


AK

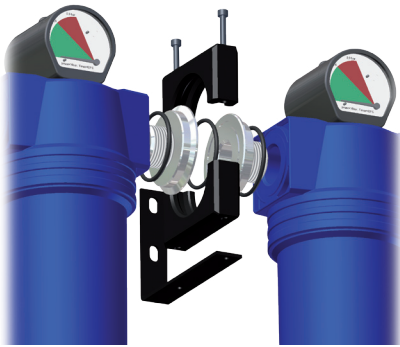

DESCRIPTION


Assembly kits have been developed to connect two or more air filters together. Construction of assembly kit is universal and it can be used for any type of filter, including filters of some other world producers. It is easy to connect two filters together and it includes supporting elements for easy mounting on the wall or other surface.

ASSEMBLY KIT FOR FILTERS

TECHNICAL DATA

Type	Connection	Operating temp.	Operating pressure	Max. load/console	Mass
AK 3/8"	3/8"	1,5 - 65°C	0 - 20 bar	0,47	0,3
AK 1/2"	1/2"	1,5 - 65°C	0 - 20 bar	0,47	0,3
AK 3/4"	3/4"	1,5 - 65°C	0 - 20 bar	0,6	0,3
AK 1"	1"	1,5 - 65°C	0 - 20 bar	1,57	0,5
AK 1 1/2"	1 1/2"	1,5 - 65°C	0 - 20 bar	2,2	0,5
AK 2"	2"	1,5 - 65°C	0 - 20 bar	2,32	1,57
AK 2 1/2"	2 1/2"	1,5 - 65°C	0 - 20 bar	2,28	1,53
AK 3"	3"	1,5 - 65°C	0 - 20 bar	2,22	1,47

2S, 3S, 2M, 3M

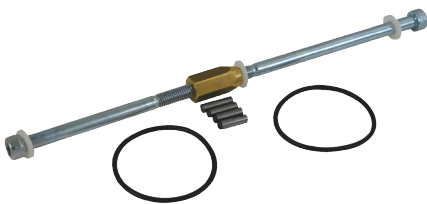

DESCRIPTION

Assembly kits are used for manifold 2 or 3 AF type filters together, without using interconnecting piping.

Types are:

- 2S 2 x AF 0056 to AF 0106
- 3S 2 x AF 0056 to AF 0106
- 2M 3 x AF 0186 to AF 0706
- 3M 3 x AF 0186 to AF 0706

ASSEMBLY KIT FOR FILTERS

WS/WM



DESCRIPTION

Wall mounting kits have been developed to easily mount filter on the wall or other surface. The kit contains 2 stainless steel consoles (which are mirrored) and 6 self-tapping screws.

WALL MOUNTING KIT FOR FILTERS

TECHNICAL DATA

TYPE	WS	WM
Fits to filter housings	AF 0056 - AF 0106	AF 0186 - AF 0706
Operating temp.	-20 to +120 °C	(-4 to 248°F)
Max. load/console kit (kg)	6	15
Mass (kg)	0,35	0,6
Material	Stainless steel	