

AOK16F SERIES

AUTOMATIC CONDENSATE DRAIN

operating pressure	16 bar
operating temp. range	1,5 to 50 °C

APPLICATIONS


- air filter

DESCRIPTION

AOK16F is designed for fully automatic discharging of condensate or any other non-aggressive fluid from compressed air⁽¹⁾ system. AOK16F is easy to install inside to the filter housing.

AOK16F can be used in variety of applications. For applications not listed please contact producer or your local distributor.

⁽¹⁾For any other technical gas please contact producer or your local distributor.

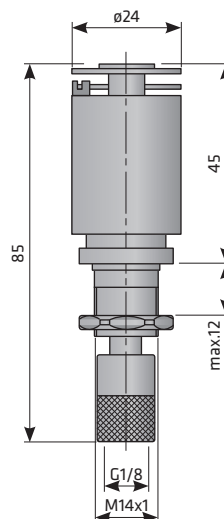

TECHNICAL DATA	AOK 16F
Operating temp. range	1,5 - 65 °C
Operating pressure	0 - 16 bar (0 - 232 psi)
Mass	0,05 kg
Connection	ø 14 mm
Outlet connection	G 1/8
Dimensions H × D	85 × ø24 mm
Medium	Condensate (air, water, oil)