

CKL-HF SERIES

ALUMINIUM CONDENSATE SEPARATORS

operating pressure	50 bar
volume flow rate	71 to 2760 Nm³/h
connections	1/2" to 3"
operating temp. range	1,5 to 65 °C
standard colour	RAL 7040

APPLICATIONS

- automotive
- electronics
- food & beverage
- chemical
- petrochemical
- plastics
- PET
- general industrial application

DESCRIPTION

CKL-HF condensate separators are designed for high efficient removal of bulk liquids from compressed air systems. Inside the housing there is a condensate separator element. This element separates already liquefied water from mainstream and prevents the liquids and large particles from being airborne again. To discharge condensate from the CKL-HF condensate separator it is essential to install automatic or electronic condensate drain.



TD 150M



page88

EMD HP



page87

AOK 50B




page92



TECHNICAL DATA

Model	Pipe size	Max. oper. pressure	Flow rate at 7 bar(g), 20 °C		Temperature oper. range		Dimensions [mm]				Mass
	DN		bar/psi	Nm ³ /h	SCFM	°C	°F	A	B	C	
CKL-HF 007	1/2"	50/725	71	42	1,5 - 65	35 - 149	250	110	30	80	2,1
CKL-HF 010	3/4"	50/725	112	66	1,5 - 65	35 - 149	250	110	30	90	2,1
CKL-HF 018	1"	50/725	204	120	1,5 - 65	35 - 149	250	110	30	140	2,1
CKL-HF 047	1 1/2"	50/725	282	166	1,5 - 65	35 - 149	535	160	45	260	9,5
CKL-HF 070	1 1/2"	50/725	400	235	1,5 - 65	35 - 149	535	160	45	360	9,5
CKL-HF 094	2"	50/725	494	291	1,5 - 65	35 - 149	715	160	45	540	12,2
CKL-HF 150	2"	50/725	799	470	1,5 - 65	35 - 149	715	160	45	550	12,2
CKL-HF 200	3"	50/725	2160	1270	1,5 - 65	35 - 149	862	198	70	620	30,4
CKL-HF 140	3"	50/725	2760	1620	1,5 - 65	35 - 149	1010	198	70	780	34,9

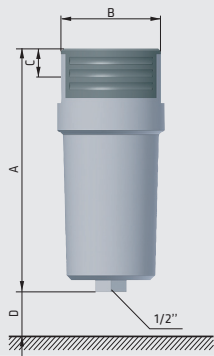

quality class - solids (ISO 8573-1)	-
quality class - water (ISO 8573-1)	8
quality class - oils (ISO 8573-1)	-
efficiency	>98%

CORRECTION FACTORS

Operating pressure [bar]	3	5	7	10	13	16	20	30	40	50
Operating pressure [psi]	44	72	100	145	189	232	290	435	580	725
Correction factor	0,50	0,75	1	1,38	1,75	2,13	2,63	3,88	5,13	6,38